

HUBER Complete Plant Hydro Duct ROTAMAT® Ro5 HD




Complete Plant with Hydro Duct

- Well-proven mechanical preliminary treatment equipment
- High grit separation efficiency
- Large grease separator with automatic grease removal
- Optional grit washing

►► Features

The unique HUBER Complete Plant Hydro Duct ROTAMAT® Ro 5HD combines the benefits of both aerated and unaerated grit traps by using a high-performance, innovative grit trap with a small overall plan area. The wastewater flows firstly through an inlet screen that retains, washes, compacts and dewateres the solids contained within the flow. The screened wastewater then passes into the grit trap tank where it generates a spiral flow. Integrated air tubes support the spiral flow and ensure that the organic particles are kept in suspension. Additionally, grease and similar substances float to the surface by the action of the aeration system within the grit trap. The flow then enters a second unaerated upflow grit trap chamber which contains an integral hydro duct that ensures a directed flow approach **from the bottom** of the chamber with positive and uniform upflow distribution. The flow velocity in the unaerated grit trap chamber is reduced to such an extent that very fine grit settles at the bottom and the grease rises to the water surface from where it is automatically removed by a well-proven paddle system. Whilst the particles separated from both chambers are removed from the grit trap by classifying screws, they are simultaneously being statically dewatered prior to being discharged into a container.

As an option the separated grit trap material can be washed in the Complete Plant. In this case the horizontal

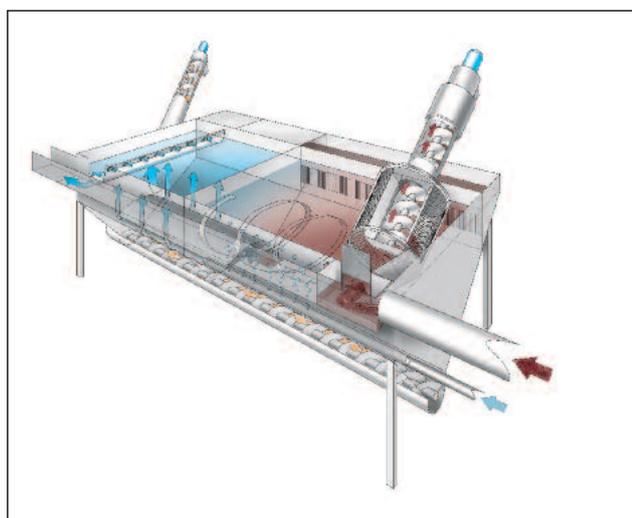

Schematic drawing of a HUBER Complete Plant Hydro Duct ROTAMAT® Ro5 HD

grit conveyor transports the separated grit fractions directly into a grit washer which is installed at the Complete Plant outlet.

Due to a defined introduction of upwardly directed service water the grit situated within the lower part of the grit washer is fluidised within the flow enabling the lighter organic particles to be separated from the dense grit particles. The separation of the lighter organic particles from the dense grit particles is supported by a rabble rake. After removal of the organic material the clean grit is automatically removed by a classifying screw, statically dewatered and discharged into a container.

►► Benefits

- Fully integrated screenings separation, washing and dewatering in one system
- Very high levels of grit separation of 95% of grain size 0.20 - 0.25 mm
- For any throughput up to 150 l/s
- Large grease separator with automatic grease removal system
- Integral emergency overflow in the grit trap as standard
- Integral grit washing system
- Above-ground or underground installation
- Small footprint and space-saving compact design
- Optionally available without inlet screen
- Completely made from stainless steel (including the screws)



Complete Plant with integrated grit washer

HUBER SE

Industriepark Erasbach A1 · D-92334 Berching
 Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810
 info@huber.de · Internet: www.huber.de

Subject to technical modification
 0,15 / 5 – 5.2016 – 4.2005

HUBER Complete Plant ROTAMAT® Ro5 HD